



UK Flowtechnik

Specialists in flow metering, pumps, couplings
and process measurement equipment

PRODUCT DATASHEET



UK Flowtechnik Ltd
1 Central Park
Lenton Lane
Nottingham
NG7 2NR
United Kingdom

Phone +44 (0) 11 59 01 71 11
UK Free Phone 0800 4334 770
Fax +44 (0) 11 59 86 88 75

sales@ukflowtechnik.com
www.ukflowtechnik.com

881 Series Threaded Sight Glasses



Straight through with spout

Ideal for gravity feed systems, intermittent flow, liquids containing entrained air and low flow rates. This model has an integral drip lip and can be mounted in any pipeline position.


Rotor

This model has a rotor to show you if the liquid is flowing. The indicator can be mounted in any pipeline position, and the light weight rotors will operate over a wide flow range.

Flap

The basic model is suitable for horizontal and vertically upward flow.

Dimensional Data

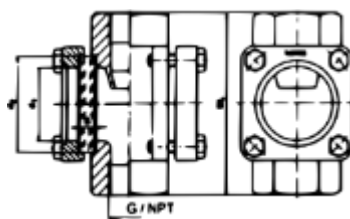

DN	1/4"	3/8"	1/2"	3/4"	1"	1.1/4"	1.1/2"	2"
BL N model	100	100	100	120	120	160	160	230
BL A model	/	/	85	85	95	/	120	150

Ordering Information

881.N 1 1 25 1 2

Style	
With Graphite Seals	881.N
With PTFE Seals (only available on CS & SS models)	881.A

Body Material		Glass Type	
Grey Cast Iron	1	Soda Lime Glass (standard, max 150°C, 16 Bar)	1
Carbon Steel	2	881.N Borosilicate Glass (max 40 Bar, max 280°C)	3
Stainless Steel	3	881.A Borosilicate Glass (max 16 Bar, max 250°C)	4

Connection Size	
1/4"	08
3/8"	10
1/2"	15
3/4"	20
1"	25
1.1/4" (style N only)	32
1.1/2"	40
2"	50

Style	
Drip Tube	1
Rotor	2
Flap	3

Thread Type	
BSPP Female	1
NPT Female (style A only)	2