


# 880 Series Flanged Sight Glasses



- Sizes up to 10"
- DIN or ANSI flanges
- Soda Lime or Borosilicate glass
- Pressure ratings up to 40 Bar

## Dimensional Information

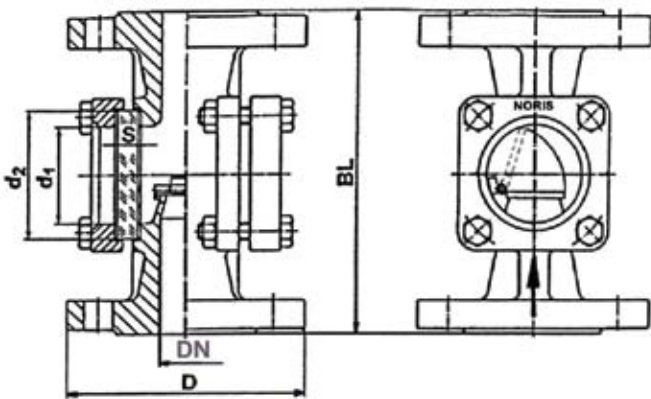

### Straight through with spout

Ideal for gravity feed systems, intermittent flow, liquids containing entrained air and low flow rates. This

model has an integral drip lip and can be mounted in any pipeline position.

### Rotor

This model has a rotor to show you if the liquid is flowing. The indicator can be mounted in any

position, and the light weight rotors will operate over a wide flow range.

### Flap

The basic model is suitable for horizontal and vertically upward flow.

DN	15	20	25	32	40	50	65	80	100	125	150	200	250
BL	130	150	160	180	200	230	290	310	350	400	480	600	730
N model													
BL	130	130	14	/	180	220	/	260	260	/	360	460	/
A model													

## Options & Ordering Information

