


881 Series Threaded Sight Glasses



- Cast Iron, Steel & St.St. designs
- Soda Lime or Borosilicate glass
- Sizes up to 2"
- Pressure ratings up to 40 Bar

Dimensional Information

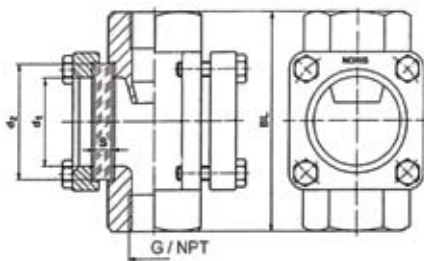

Straight through with spout

Ideal for gravity feed systems, intermittent flow, liquids containing entrained air and low flow rates. This model has an integral drip lip and can be mounted in any pipeline position.

Rotor

This model has a rotor to show you if the liquid is flowing. The indicator can be mounted in any pipeline position, and the light weight rotors will operate over a wide flow range.

Flap

The basic model is suitable for horizontal and vertically upward flow.

DN	1/4"	3/8"	1/2"	3/4"	1"	1.1/4"	1.1/2"	2"
BL								
N model	100	100	100	120	120	160	160	230
BL	/	/	85	85	95	/	120	150
A model								

Options & Ordering Information

